

Compact Cylinder DPDM-Q-32-25-PA - Festo 4828469

Item no. FES-4828469


Manufacturer Festo

EAN 4052568292256

Festo pneumatic cylinder for precise linear motion and defined force in automation.

TECHNICAL DATA

Ausführungstyp	einseitige Kolbenstange
Betriebsdruck max [bar]	8.000000
Bohrung (mm)	32.000000
Corrosion resistance class CRC	2 - moderate corrosion stress
Cushioning	P: Elastic silencer rings / plates double-sided
Design	Piston, piston rod, profile tube
Dichtmaterial	TPE-U(PU)
Funktion	doppeltwirkend
HS-Code	84123100
Hub [mm]	25
Medium	Druckluft
Mounting position	arbitrary
Pneumatischer Anschluss	G1/8
Position sensing	Yes
Serie	DPDM
Temperature (max.)	80
Weight	0.45 kg
Werkstoff	Aluminium

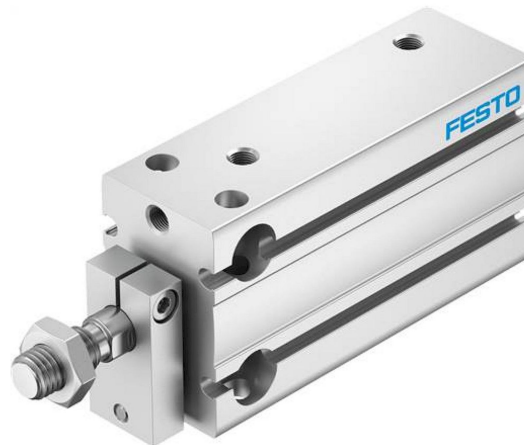

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic cylinder for precise linear motion and defined force in automation. The key technical data of this genuine Festo article are listed below.

Stroke [mm]	25
Piston diameter	32 mm
Dampening	P: Elastic silencer rings / plates double-sided
installation position	arbitrary
Principle of operation	double acting
Construction set up	Piston piston rod profile tube
Position detection	For proximity switch

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Variants	One-sided piston rod
Operating pressure [bar]	1 to 8
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	2 - moderate corrosion stress
ambient temperature [°C]	-10 to 80
Theoretical force at 6 bar [N]	483
Theoretical force at 6 bar, flow [N]	483
Moving mass at 0 mm stroke [g]	109,0
Weight supplement per 10 mm stroke [g]	52,5
Base weight at 0 mm stroke [g]	331,0
Supplement moved mass per 10 mm stroke [g]	10,5
Fastening type	With throughway bores With female thread Selectively:
Pneumatic connection	G1/8
Material information	RoHs compliant
Cover material	Aluminium wrought alloy
Seals material	TPE-U(PU)
Housing material	Aluminium wrought alloy, anodised
Piston rod material	High-alloyed stainless steels
Theoretical force at 6 bar, Return flow [N]	415
Anti-twist lock / guide	Guide rod with yoke