

Mini Slide DGST-20-50-Y12A - Festo 8085185

Item no. FES-8085185


Manufacturer Festo

EAN 4052568450731

Festo pneumatic cylinder for precise linear motion and defined force in automation.

TECHNICAL DATA

Betriebsdruck max [bar]	8.000000
Bohrung (mm)	20.000000
HS-Code	84123100
Hub [mm]	50.000000
Pneumatischer Anschluss	G1/8
Weight	1.4 kg
Werkstoff	Aluminium

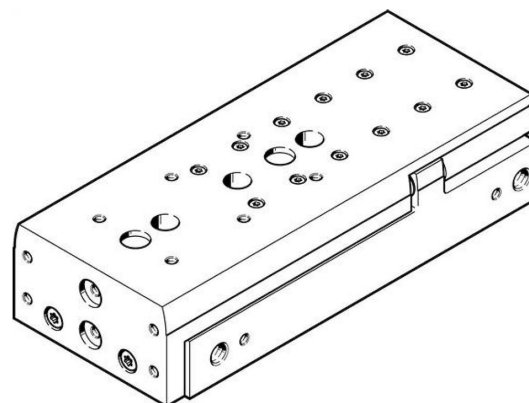

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic cylinder for precise linear motion and defined force in automation. The key technical data of this genuine Festo article are listed below.

Stroke [mm]	50
Piston diameter	20 mm
Operating mode actuator unit	Joch
Dampening	Y12: externe hydraulische Dämpfung
installation position	arbitrary
Guide	Ball cage guide
Construction set up	Doppelkolben Joch Kolbenstange Schlitten
Position detection	For proximity switch
Operating pressure [bar]	1 to 8
Max. speed [m/s]	0,5
Repeatability	± 0,02 mm
Principle of operation	double acting

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	1 - low corrosion stress
ambient temperature [°C]	-10 to 60
Impact energy at the end positions [J]	1,900
Dampening length [mm]	8,0
Max. force Fy [N]	1.080
Max. force Fz [N]	1.080
Max. torque Mx [Nm]	9,0
Max. torque My [Nm]	10,0
Max. torque Mz [Nm]	10,0
Theoretical force at 6 bar, Return flow [N]	317
Theoretical force at 6 bar, flow [N]	377
Moving mass [g]	606,0
Product weight [g]	1.310,0
Fastening type	With throughway bores
Pneumatic connection	G1/8
Material information	Copper and PTFE-free RoHs compliant
Cover material	Aluminium wrought alloy
Seals material	HNBR
Werkstoff Führung	POM TPE-E hochlegierter Stahl
Housing material	Aluminium wrought alloy
Piston rod material	High-alloyed stainless steels
Alignable end position range / Length front [mm]	27,0
Alignable end position range / Length rear [mm]	26,5