

Line Choke CAMF-C6-FD-C6-3A - Festo 8088930

Item no. FES-8088930

Manufacturer Festo


EAN 4052568451752

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

HS-Code 85045000

Weight 2 kg

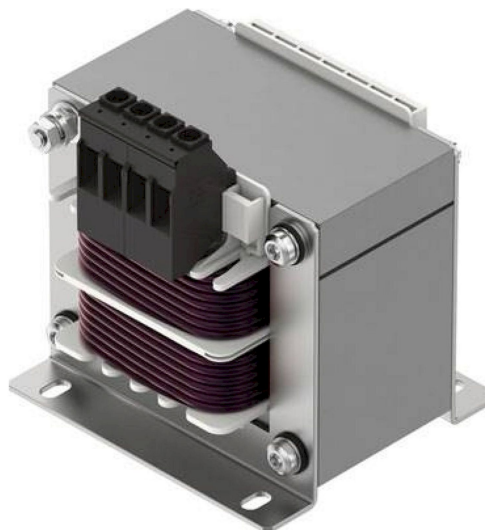

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

installation position	Horizontal
Network frequency [Hz]	50 to 60
Permission	ENEC c UL - Recognized (OL)
CE certificate (see declaration of conformity)	nach EU-RoHS-RL
Bearing temperature [°C]	-10 to 40
Protection category	IP00
ambient temperature [°C]	-10 to 40
Product weight [g]	2.000
Fastening type	Assembly plate, screwed
Material information	LABS containing materials included RoHs compliant
Operating voltage range AC [V]	0 to 400
Nominal operating voltage AC [V]	400
Electrical connection 1, function	Spannungsversorgung
Electrical connection 1, connection type	Multi tube holder

Electrical connection 1, connection technology	Screw clamp
Electrical connection 1, number of pins / wires	2
Electrical connection 1, occupied pin / wire	2
Electrical connection 2, function	Spannungsversorgung
Electrical connection 2, connection type	Multi tube holder
Electrical connection 2, connection technology	Screw clamp
Electrical connection 2, number of pins / wires	2
Electrical connection 2, occupied pin / wire	2
Short circuit resistance	no
Current carrying capacity at 40°C [A]	6
Insulation voltage [V]	2.500
Elektrischer Anschluss 1, Leiterquerschnitt [mm²]	4
Elektrischer Anschluss 2, Leiterquerschnitt [mm²]	4
Nenninduktivität [mH]	5,7
Toleranz Nenninduktivität [%]	10