

## EMC EU 32/20. Direct assembly cylinder, Piston 32mm, stroke 20mm, Standard

Item no. FL-EU-32/20

Manufacturer E.MC


EAN 4050571872120

Direct assembly cylinder, Piston 32mm,stroke 20mm, Standard

### TECHNICAL DATA

HS-Code 84123100

Weight 0.48 kg

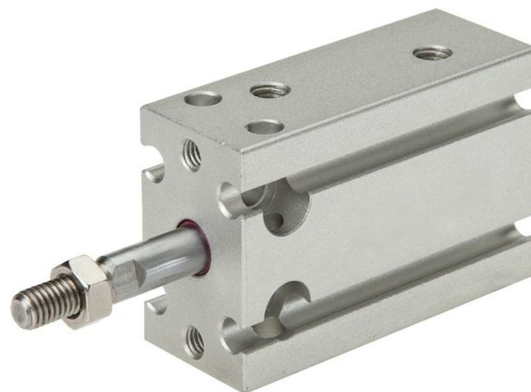

### DESCRIPTION

Materials:

Body: Anodized aluminium, piston rod: Stainless steel, Piston: Aluminium, Gaskets: NBR / PUR

Temperature range:

-10 to +60 °C

Operating pressure:

max. 7 bar

Version:

with magnetic piston, piston diameter 6 mm and 10 mm are supplied with two nuts on piston rod

Cylinder switch type:

D

Advantages:

- space saving through square housing, which allows a direct mounting without mounting material
- can be fastened on each of the 6 sides of the square,
- main mounting dimensions identical to SMC series CDU / CDUK

Piston diameter [mm]

32

**esd.equipment**

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

**esd.equipment**

Page 1/2

|                         |                           |
|-------------------------|---------------------------|
| Stroke [mm]             | 20                        |
| Version                 | Standard                  |
| E (piston rod thread)   | M 10x1,25                 |
| G (compressed air port) | G 1/8"                    |
| Repair sets             | <a href="#">EU 32 REP</a> |
| A1 [mm]                 | 52                        |
| A2 [mm]                 | 79                        |
| B [mm]                  | 40                        |
| C [mm]                  | 62                        |
| D [mm]                  | 12                        |
| D1 [mm]                 | 27                        |
| E1 [mm]                 | 19,5                      |
| E2 [mm]                 | 22,0                      |
| G1 [mm]                 | 23,0                      |
| G2 [mm]                 | 12,5                      |
| G3 [mm]                 | 4,5                       |
| G4 [mm]                 | 9,0                       |
| H [mm]                  | 11.0 (11.5 deep)          |
| H1 [mm]                 | 6,6                       |
| H2 [mm]                 | 24                        |
| H3 [mm]                 | 11                        |
| H4 [mm]                 | 24                        |
| J                       | M 6                       |
| J1 [mm]                 | 48                        |
| J2 [mm]                 | 9                         |
| SW [mm]                 | 10                        |