

EMC EXSM 10/30. Double piston cylinder, piston 10mm, stroke 30mm

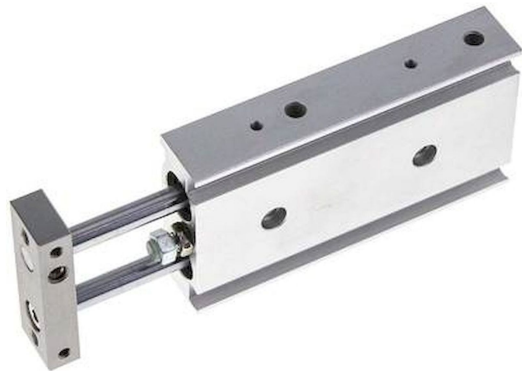
Item no. FL-EXSM-10/30

Manufacturer E.MC

EAN 4050571874179

Double piston cylinder, piston 10mm, stroke 30mm

TECHNICAL DATA

HS-Code **84123100**Weight **0.2 kg**

DESCRIPTION

Materials:

Body and plate: Anodized aluminium, piston rods: Steel, hard chrome-plated, piston: Aluminium,
Gaskets: NBR / PUR

Temperature range:

-10 to +60 °C

Operating pressure:

max. 7 bar

Version:

With Magnetic piston

Cylinder switch type:

D, A

Advantages:

- Guidance with self-lubricating sliding bearings,
- Twist tolerance < 0.2° (±),
- ideal for Pick-and-Place applications,
- stroke adjustment range 0 to -5 mm,
- air connection from the top or below (closed with stopper plugs),

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

- main installation dimensions identical to SMC series CXS

Piston diameter [mm]	10
Stroke [mm]	30
Stroke (adjustment range) [mm]	25 - 30
Version	Double piston cylinder
G (compressed air port)	M 5
Repair sets	EXSM 10 REP
lateral force permissible [N]	2,4
A [mm]	72,0
B [mm]	17,0
C [mm]	55
D [mm]	40
D1	40
E [mm]	20
E1 [mm]	20
F [mm]	36,5
H [mm]	9
I [mm]	20
K [mm]	35
L [mm]	44
M [mm]	15
N1 [mm]	30,0
N2 [mm]	8,0
R [mm]	3,5
S [mm]	46
T [mm]	17
V [mm]	6
P1	6.5 (3.3 deep)
P2	M 4
P3	M 4
P4	M 3
P5 [mm]	3,4
P6	M 3
Q2 [mm]	7
Q6 [mm]	5,0