

ESD earthing point with 3x 10 mm snap and 3 m earth lead, yellow - Safeguard WL24948


Item no. WL24948

Manufacturer Safeguard

Safeguard ESD earthing point for mounting under the table top with three 10 mm snaps for personnel grounding. The 3 m earth lead links the point to the protective earth, and each connection has a 1 MΩ safety resistor.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Colour	Yellow
Norm	IEC 61340-5-1
Sales unit	1 Stück
Weight	0.1 kg

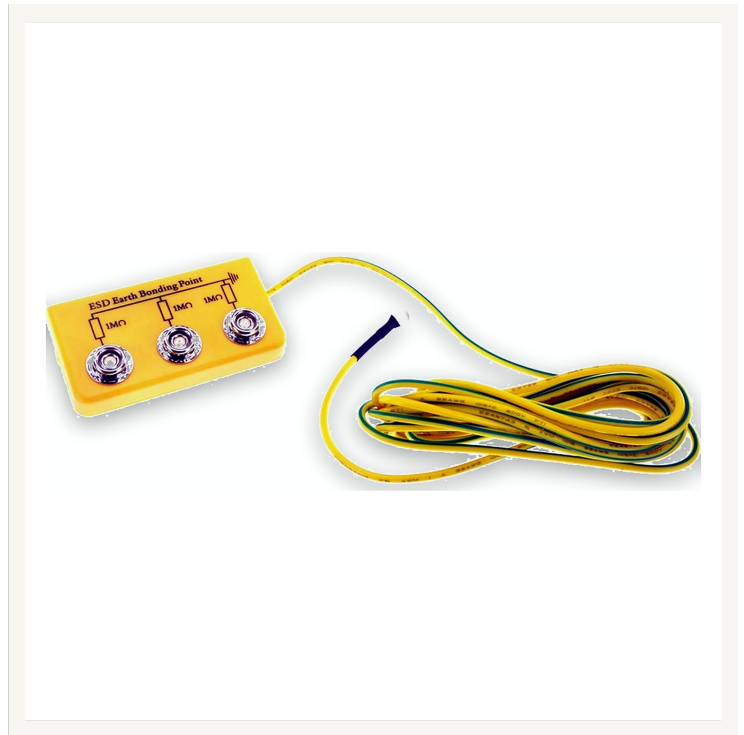

STANDARDS & COMPLIANCE

ESD safe IEC 61340-5-1

DESCRIPTION

The Safeguard ESD earthing point is mounted under the table top and provides three 10 mm snaps for personnel grounding. The supplied 3 m earth lead connects the point to the protective earth.

BENEFITS

- three 10 mm snap connections for personnel grounding
- for mounting under the table top
- 3 m earth lead included
- 1 MΩ safety resistor per connection

TECHNICAL DATA

- Connections: 3 x 10 mm snap
- Safety resistor: 1 MΩ per connection
- Earth lead: 3 m
- Mounting: under the table top
- Colour: yellow

APPLICATION

For personnel grounding at EPA workstations where several grounding cords are connected under the table top.

STANDARDS

Suitable for building ESD protected areas to IEC 61340-5-1.