

Polyester film self-adhesive, one-sided dissipative, transparent, per metre - A1-ESD EP1301032


Item no. EP1301032

Manufacturer A1-ESD

Transparent self-adhesive polyester film for retrofitting insulating surfaces. One-sided dissipative with surface resistance 10^6 to $10^8 \Omega$, 0.1 mm thick, 1.22 m wide. Supplied by the running metre to IEC 61340-5-1.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Colour	Transparent
Norm	IEC 61340-5-1
Sales unit	Pro laufendem Meter (Breite 1,22 m)
Weight	1.6 kg

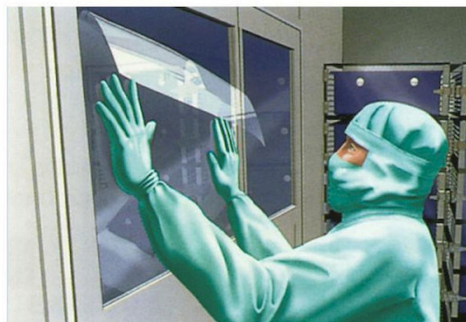

STANDARDS & COMPLIANCE

IEC 61340-5-1

DESCRIPTION

This transparent polyester film retrofits smooth insulating surfaces with dissipative properties. It is dissipative on one side and supplied by the running metre from the roll (1.22 m wide), so worktops, shelves or covers inside an EPA can be coated to standard.

BENEFITS

- Self-adhesive backing for direct application without extra glue
- Abrasion-resistant surface coating for lasting protection
- Transparent, suitable for labelled and visible surfaces

TECHNICAL DATA

- Material: polyester (PET) with abrasion-resistant coating
- Type: one-sided dissipative, self-adhesive
- Surface resistance R_s : 10^6 to $10^8 \Omega$
- Film thickness: 0.1 mm
- Roll width: 1.22 m
- Colour: transparent

- Sold by the running metre

APPLICATION

Ideal for retrofitting insulating surfaces in electronics manufacturing, the laboratory and test areas to turn them into a dissipative surface.

STANDARDS AND COMPLIANCE

Meets the requirements for dissipative surfaces to IEC 61340-5-1.