

SG-LPT-ROSA-ABL-55-150X500. ESD bubble wrap, pink conductive, width 500 mm, 150 m roll


Item no. WL24845

Manufacturer Safeguard

ESD-Luftpolsterfolie rosa ableitend, Breite 500 mm, 150 m Rolle

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Certification	IEC 61340
Colour	Rose
Weight	0.0099 kg

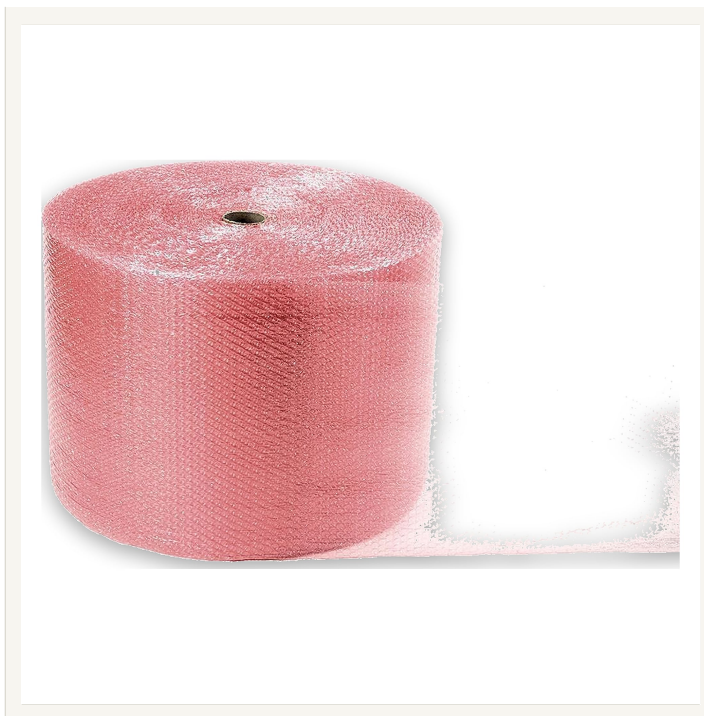

STANDARDS & COMPLIANCE

ESD safe DIN EN 610340-5-1 DIN EN 61340

DESCRIPTION

DESCRIPTION

The conductive ESD bubble wrap from SafeGuard is 2-ply and can be welded together. The knob diameter is 10 mm and of course meets the requirements of DIN EN 610340-5-1.

- Surface resistance: $R_{pp} < 1 \times 10^{10} \Omega$
- Properties: Conductive LDPE
- stud diameter: 10mm
- 2-ply
- weldable, recyclable, amine-free
- complies with DIN EN 61340 and ROHS directive

PRODUCT DETAILS

item number	WL24845
manufacturer	SAFEGUARD
model	SafeGuard ESD

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

length	150000 mm
width	500 mm
order unit	roll
content unit	150 m
property packaging	dissipative
film thickness	55µm +/- 10 %