

SG-LPT-ROSA-ABL-55-150X750. ESD bubble wrap, pink conductive, width 750 mm, 150 m roll


Item no. WL24847

Manufacturer Safeguard

ESD-Luftpolsterfolie rosa ableitend, Breite 750 mm, 150 m Rolle

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Certification	IEC 61340
Colour	Rose
Weight	0.0099 kg

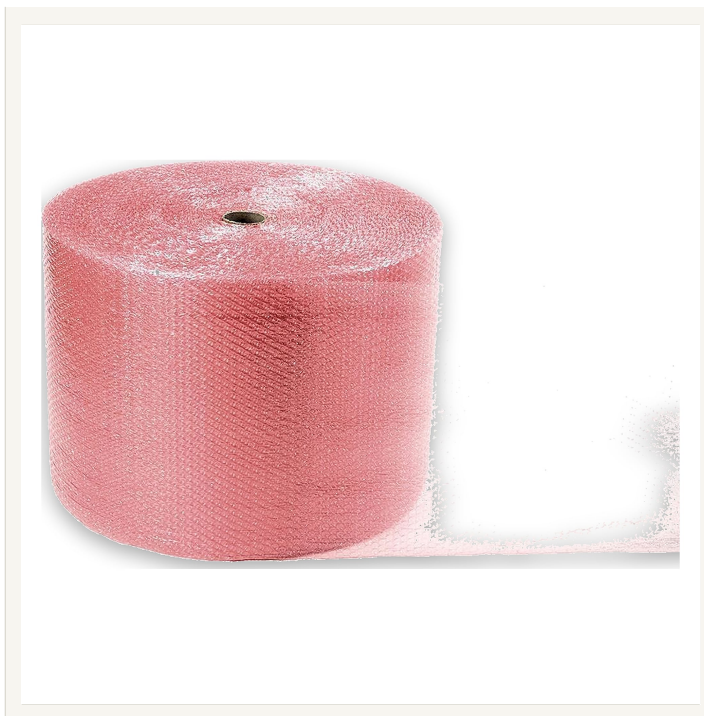

STANDARDS & COMPLIANCE

ESD safe DIN EN 610340-5-1 DIN EN 61340

DESCRIPTION

DESCRIPTION

The conductive ESD bubble wrap from SafeGuard is 2-ply and can be welded together. The knob diameter is 10 mm and of course meets the requirements of DIN EN 610340-5-1.

- Surface resistance: $R_{pp} < 1 \times 10^{10} \Omega$
- Properties: Conductive LDPE
- stud diameter: 10mm
- 2-ply
- weldable, recyclable, amine-free
- complies with DIN EN 61340 and ROHS directive

PRODUCT DETAILS

item number	WL24847
manufacturer	SAFEGUARD
model	SafeGuard ESD

length	150000 mm
width	750 mm
order unit	roll
property packaging	dissipative
film thickness	55µm +/- 10 %