

VDE Screwdriver Cross-Recess PH1 Ø 4.5 mm, Overall Length 187 mm - Bernstein 14-682-VDE

Item no. **BS-14-682-VDE**

Manufacturer **Bernstein**


EAN **4250838509657**

This VDE screwdriver with cross-recess blade PH1 Ø 4.5 mm is hardened and burnished along its full length and tested to IEC 60900 / EN 60900 for work up to 1000 volts. The 2-component plastic handle is shockproof and safety insulated. It features a hanging hole for tidy tool storage.

TECHNICAL DATA

HS-Code **82054000**

Weight **0.057 kg**

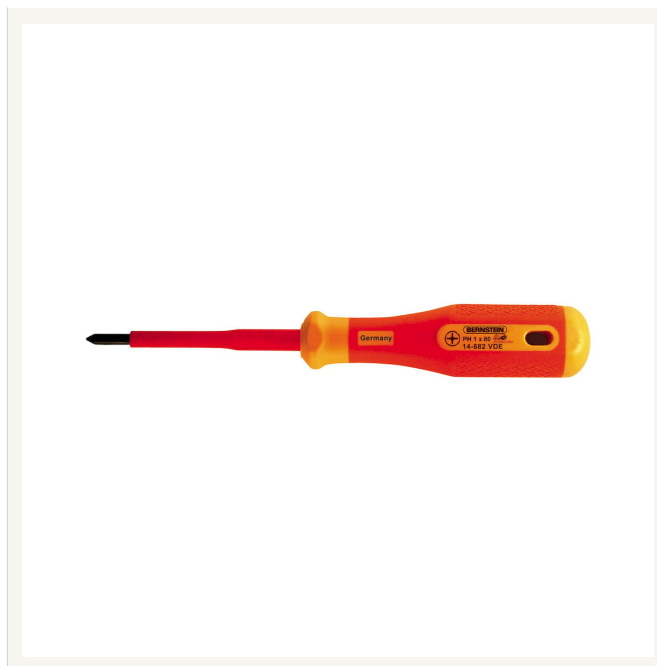

STANDARDS & COMPLIANCE

IEC 60900 **EN 60900** **DIN IEC 60900**

DESCRIPTION

This VDE screwdriver with cross-recess blade PH1 Ø 4.5 mm is built for connections on live equipment up to 1000 volts.

ADVANTAGES

- Blade cross-recess PH1 Ø 4.5 mm, hardened and burnished along its full length.
- 2-component plastic handle, shockproof and safety insulated.
- Practical hanging hole for tool storage.
- Individually tested to VDE guidelines DIN IEC 60900 / EN 60900.
- Handy weight of 57 g at 187 mm overall length.

TECHNICAL DATA

Feature	Value
Handle	2-component plastic
Handle body	shockproof
Insulation	safety insulated
Hanging hole	present

Feature	Value
Blade	hardened the whole length, burnished
Standard	DIN 7438
Overall length	187 mm
Weight	57 g

APPLICATION

The screwdriver suits electrical installation, switch cabinet assembly and service on live equipment with PH1 cross-recess screws.

STANDARDS AND DELIVERY DATA

- Tested to VDE EN 60900 / IEC 60900, approved for work up to 1000 volts.
- Insulation is REACH compliant and phthalate free.
- EAN 4250838509657.
- Customs tariff number 82054000.
- Country of origin Germany.