

Round soldering tip 3.7 mm bent for PULSMATIC 55N - JBC C30D


Item no. WL13293

Manufacturer JBC

Round, bent soldering tip 3.7 mm in diameter for the JBC PULSMATIC 55N and the 55N handpiece on the TB-3220. Copper-plated and pre-tinned, with the largest heat reserve in the series.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Certification	IEC 61340-5-1
Country of Manufacture	Spain
HS-Code	85159080900
Weight	0.1 kg

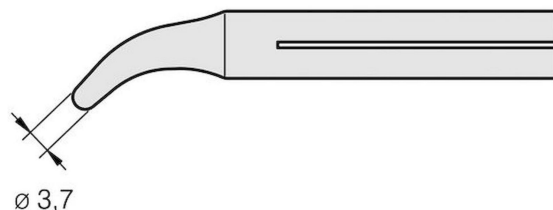

STANDARDS & COMPLIANCE

ESD safe IEC 61340-5-1

DESCRIPTION

The C30D soldering tip is the matching wear part for the JBC 55N iron on the PULSMATIC and TB-3220. With a 3.7 mm tip diameter it is the heaviest round tip in this series and delivers the largest heat reserve for strongly heat-sinking joints.

BENEFITS

- Round tip shape 3.7 mm in diameter for the largest joints
- Maximum heat reserve for ground planes, solder tags and thick conductors
- Bent alignment for better access in dense assemblies
- Copper-plated for high heat conduction from the heating element
- Pre-tinned, so it wets from the first joint

TECHNICAL DATA

Item no.	WL13293
Model	C30D
Manufacturer	JBC

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Manufacturer item no.	550608
Soldering tip diameter	3.7 mm
Tip shape	round
Tip alignment	bent
Coating	copper-plated, pre-tinned
Suitable soldering iron	55N
Suitable handpiece	55N
Dimensions with packaging (LxWxH)	60 x 35 x 27 mm
Order unit	piece

APPLICATIONS

Soldering at strongly heat-sinking points, repair and production soldering with the JBC 55N. The round 3.7 mm tip suits large through-hole components, solder tags and thick conductors.

COMPATIBILITY AND SCOPE OF DELIVERY

Suitable for the JBC 55N iron and handpiece on the PULSMATIC 55N and TB-3220. Supplied as a single tip (1 piece).

Suitable for ESD workplaces in accordance with IEC 61340-5-1. Made in Spain.