

Alsident 50-3727-3-4. **Extraction arm system DN50** **3 joints, 750 mm, red -** **ceiling mounting**


Item no. WL20632

Manufacturer Alsident

Extraction arm system DN50 3 joints, 750 mm, red - ceiling mounting

TECHNICAL DATA

Colour	Red
Weight	0.1 kg

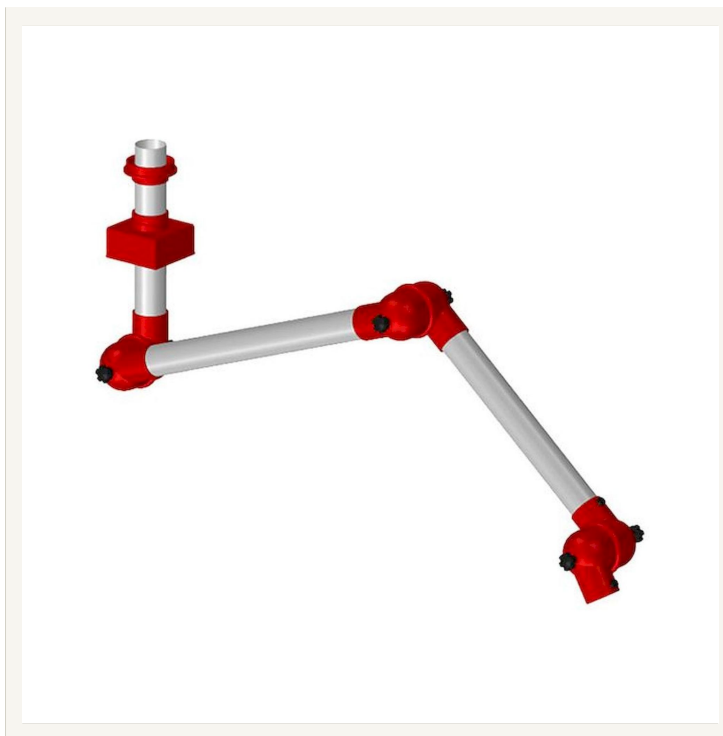

DESCRIPTION

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m3/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools.

- Maintenance-free O-ringsIntegrated throttle valve that is in open position from the air stream to ensure maximum flow rate
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- All components RoHS compliant

PRODUCT DETAILS

item number	WL20632
model	50-3727-3-4
manufacturer	ALSIDENT
manufacturer item number	50-3727-3-4
order unit	piece
colour	red

material	Anodised aluminium tubes - layer thickness 10 µ, polypropylene joints
product series	Alsident System 50 AL
diameter of tube	50 mm
air volume extraction arm	45–85 m³/h
joint colour	red
range	750 mm
number of joints	3
assembling	ceiling mounting
ESD safe	no