

Desoldering tip tunnel 7.1 x 13 mm for dual-in-line ICs, C245 - JBC C245-222


Item no. WL21482

Manufacturer JBC

SMD desoldering tip of the C245 series for the T245 soldering iron, tunnel 13 x 7.1 mm, with integrated heater for fast heat-up. Total length 120 mm, sold individually.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Country of Manufacture	Spain
HS-Code	85159080900
Serie	C245
Weight	0.1 kg

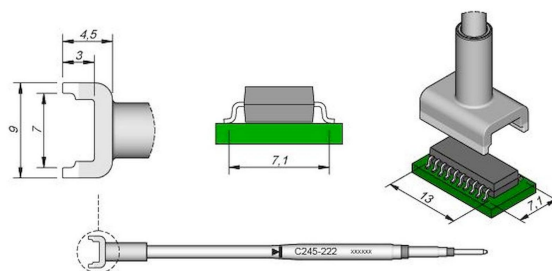

STANDARDS & COMPLIANCE

ESD safe IEC 61340-5-1

DESCRIPTION

This C245 series SMD desoldering tip (C245-222) lifts tunnel 13 x 7.1 mm components cleanly off the board without damaging neighbouring parts. The heater is integrated in the cartridge, right at the tip, for fast heat-up and a stable working temperature.

BENEFITS

- Heater integrated in the cartridge for fast heat-up and short recovery time
- tunnel geometry for tunnel 13 x 7.1 mm parts, all leads heated at once
- Total length 120 mm, compatible with the T245 soldering iron
- Lead-free capable, suitable for professional SMD rework

TECHNICAL DATA

Item no.	WL21482
Model	C245-222
Manufacturer	JBC
Manufacturer item no.	C245222

Tip series	C245
Tip geometry	tunnel
Tip size	tunnel 13 x 7.1 mm
Integrated heater	yes
Total length	120 mm
Suitable soldering iron	T245
Suitable handpiece	T245
Dimensions with packaging (LxWxH)	110 x 12 x 12 mm
Order unit	piece

APPLICATIONS

Removing complete dual-in-line ICs (DIL) with a 13 x 7.1 mm body in a single operation; SMD rework and PCB repair.

COMPATIBILITY AND SCOPE OF DELIVERY

Fits the JBC T245 soldering iron (formerly AD-2245). Scope of delivery: one C245 desoldering tip. Sold individually.

Manufacturer JBC, country of origin Spain. ESD-safe working to IEC 61340-5-1. CE, RoHS.