

Desoldering tip QFP/PLCC 12.4 x 15 mm four-sided, C245 - JBC C245-228


Item no. WL21491

Manufacturer JBC

SMD desoldering tip of the C245 series for the T245 soldering iron, QFP/PLCC 12.4 x 15 mm, with integrated heater for fast heat-up. Total length 120 mm, sold individually.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Country of Manufacture	Spain
HS-Code	85159080900
Serie	C245
Weight	0.1 kg

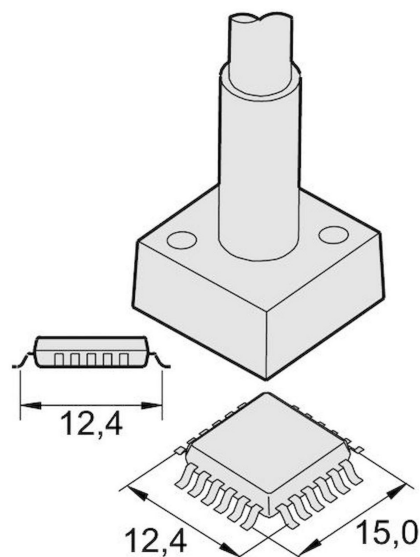

STANDARDS & COMPLIANCE

ESD safe IEC 61340-5-1

DESCRIPTION

This C245 series SMD desoldering tip (C245-228) lifts QFP/PLCC 12.4 x 15 mm components cleanly off the board without damaging neighbouring parts. The heater is integrated in the cartridge, right at the tip, for fast heat-up and a stable working temperature.

BENEFITS

- Heater integrated in the cartridge for fast heat-up and short recovery time
- QFP/PLCC geometry for QFP/PLCC 12.4 x 15 mm parts, all leads heated at once
- Total length 120 mm, compatible with the T245 soldering iron
- Lead-free capable, suitable for professional SMD rework

TECHNICAL DATA

Item no.	WL21491
Model	C245-228
Manufacturer	JBC
Manufacturer item no.	C245228

Tip series	C245
Tip geometry	QFP/PLCC
Tip size	QFP/PLCC 12.4 x 15 mm
Integrated heater	yes
Total length	120 mm
Suitable soldering iron	T245
Suitable handpiece	T245
Dimensions with packaging (LxWxH)	110 x 12 x 12 mm
Order unit	piece

APPLICATIONS

Removing four-sided QFP and PLCC components with a 12.4 x 15 mm footprint; even heating of all lead rows.

COMPATIBILITY AND SCOPE OF DELIVERY

Fits the JBC T245 soldering iron (formerly AD-2245). Scope of delivery: one C245 desoldering tip. Sold individually.

Manufacturer JBC, country of origin Spain. ESD-safe working to IEC 61340-5-1. CE, RoHS.