

ESD floor mat in foamed polyurethane, dissipative, black, flattened hemisphere studs, 960 x 660 x 12 mm - Safeguard SG-BM-SCH-HNO-ODK-960X660X12


Item no. WL42673

Manufacturer Safeguard

Dissipative ESD floor mat with a flattened hemisphere stud surface that eases the strain on muscles and joints. Impact, slip and footfall sound dampening per DIN EN 61340-5-1.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Colour	Black
Depth	960
Height	12
Norm	IEC 61340-5-1
Sales unit	1 Stück
Weight	0.1 kg
Width	660

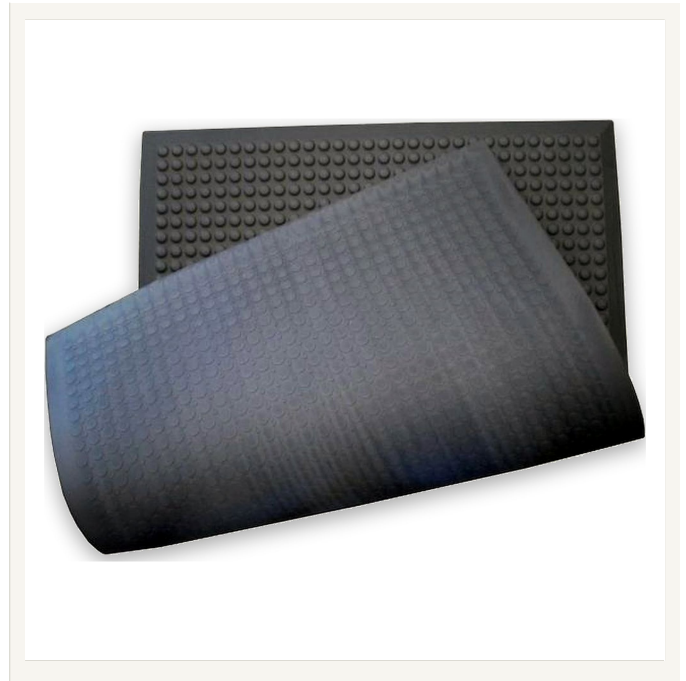

STANDARDS & COMPLIANCE

ESD safe DIN EN 61340-5-1 DIN 4102

DESCRIPTION

The Safeguard ESD floor mat eases the strain on muscles and joints and suits standing workstations in production. It dampens impact and footfall sound, resists slipping and complies with DIN EN 61340-5-1.

BENEFITS

- Dissipative surface with flattened hemisphere studs, gentle on muscles and joints
- Bevelled edges all around as a trip guard
- Impact and slip resistant, elastic damping, thermal and footfall sound insulation
- Available cut to many shapes and sizes, extendable by bonding

TECHNICAL DATA

- Material: foamed polyurethane
- Surface: flattened hemisphere studs
- Underside: slip-resistant disc profile
- Dimensions (L x W x H): 960 x 660 x 12 mm
- Connection: 10 mm snap button
- Fire behaviour: DIN 4102 Klasse B2

- Colour: black

APPLICATIONS

For ESD protected areas (EPA) at standing workstations in production, assembly and inspection.

STANDARDS AND COMPLIANCE

Electrostatically dissipative per DIN EN 61340-5-1.