

## Knipex 00 11 04. Profi-Key for common shut-off systems, 90 mm

Item no. WL61199


Manufacturer Knipex

Profi-Key for common shut-off systems, 90 mm

### TECHNICAL DATA

Weight

0.1 kg

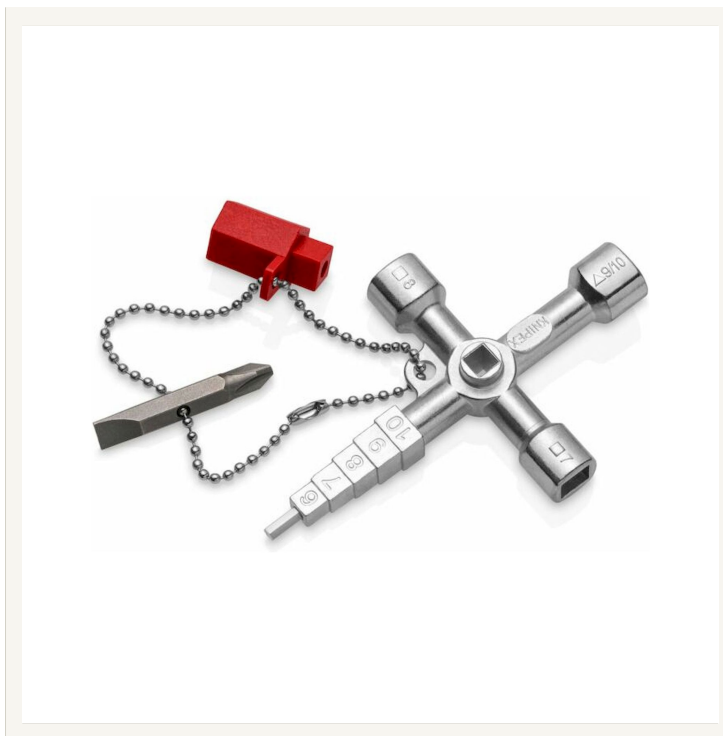

### DESCRIPTION

Profi-Key key for heating, air-conditioning, sanitary and building services engineering, e.g. for door and window handles or for heating venting. With bit insert: slot 1.0 x 7 mm and cross recess PH2. With adapter for 1/4" bits on a fastening chain. Additional bit holder for 1/4" bits in one arm. Total arm length: 90 mm. - Capacity square: 5,0 / 7,0 / 8,0mm - Capacity step square: 6mm - Capacity triangular: 9,0 - 10,0mm

- Wrenches for heating, air-conditioning, sanitary and building services engineering, e.g. for door and window handles or for heating system venting
- With bit insert: slot 1.0 x 7 mm and cross recess PH2
- With adapter for 1/4" bits on a fastening chain
- Additional bit holder for 1/4" bits in one arm
- Total arm length: 90 mm

### PRODUCT DETAILS

|                          |                        |
|--------------------------|------------------------|
| item number              | WL61199                |
| model                    | 00 11 04               |
| manufacturer             | KNIPEX                 |
| manufacturer item number | 00 11 04               |
| dimensions (LxWxH)       | 160 mm x 85 mm x 15 mm |

#### esd.equipment

Keldersstr. 15  
42697 Solingen, Deutschland  
VAT ID: DE269659389

Phone: +49 212 38340680  
shop@esd-equipment.com

**esd.equipment**

Page 1/2

|                                   |                        |
|-----------------------------------|------------------------|
| dimensions with packaging (LxWxH) | 160 mm x 86 mm x 13 mm |
| Packaging volume                  | 0.179 dm <sup>3</sup>  |
| order unit                        | piece                  |
| type of packaging                 | single pack            |
| RoHS conform                      | no                     |
| VDE                               | no                     |
| ESD safe                          | no                     |