



L-handle screwdrivers: Very robust with continuous blade.

**2 YEAR
GUARANTEE!**

For full
professional use!



L-handle screwdrivers

If high torques are required for tightening or loosening screws, the L-handle screwdriver is the solution. The ergonomic and asymmetrical grip simplifies handling under continuous operation. Its two-component design with soft zones reduces pressure marks while at the same time allowing for optimum torque transfer. Easy-to-read sizes on shaft (laser marking) and handle.

- ❶ Graded grip sizes correspond with the necessary torque of the respective blade size.
- ❷ With transverse hole for hanging up.
- ❸ Oil and acid-resistant non-stick special rubber handle.
- ❹ Easy to read sizes through laser marking process on matte-chrome plated shafts of chrome silicon manganese molybdenum alloy special steel. Continuously hardened and stress-relieved with a balanced ratio of torsional rigidity and toughness.
- ❺ Processed black tip for greatest precision for accepting screws. Also prevents tool from slipping.



Difficult to access
Allen screws can be screwed
at a working angle of
up to 25° with HX Ball.



When using the screw
socket of the short blade,
the longer shank is used
as "lever" for extreme torque.



○ L-handle HX screwdrivers

Short blade with sturdy standard HX, long blade with HX Ball (ball head).


NO	HX	A mm	B mm	C mm
22 402	2	110	15	55
22 404	2.5	110	15	55
22 406	3	110	15	55
22 408	4	110	15	55
22 410	5	160	20	75
22 412	6	160	20	75
22 414	7	160	20	75
22 416	8	200	20	75
22 418	10	215	20	100



⊛ L-handle TX screwdrivers

Short blade with sturdy standard TX, long blade with Tamper TX (with frontal hole).

NO	TX	A mm	B mm	C mm
22 440	8	110	15	55
22 442	9	110	15	55
22 444	10	110	15	55
22 446	15	110	15	55
22 448	20	110	15	55
22 450	25	160	20	75
22 452	27	160	20	75
22 454	30	160	20	75
22 456	40	185	20	75
22 458	45	215	20	100
22 460	50	215	20	100

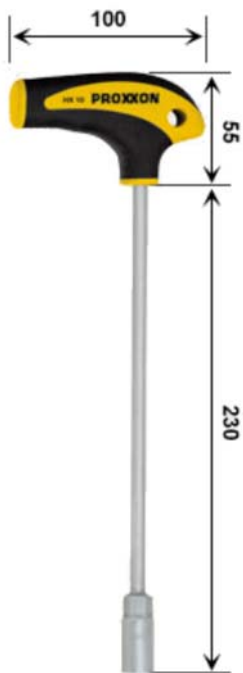

● L-handle HX nut screwdrivers

Optimum blade lengths for working on motors and all kinds of machines. Flats on HX nut allow for use of an open-end spanner to effortlessly loosen tightly locked screws.

- NO**
 22 476
 22 478
 22 482
 22 486
 22 488

- HX**
mm
 7
 8
 10
 12
 13

L-handle screwdriver sets

With versatile holder for the workshop. Clear specified sizes on the holder for neat storage of L-handle screwdrivers.



- NO**
 22 650 ○ 8-piece L-handle HX set with holder
 HX 2 - 2.5 - 3 - 4 - 5 - 6 - 8 - 10
 22 652 ⊕ 10-piece L-handle TX set with holder
 TX 8 - 10 - 15 - 20 - 25 - 27 - 30 - 40 - 45 - 50