



i-CON VARIO 2 MK2 with i-TOOL AIR S and X-TOOL VARIO

i-CON VARIO 2 MK2

Multichannel soldering and desoldering station

The multichannel soldering and desoldering station **i-CON VARIO MK2** provides the professional user with two soldering tools as listed on the right that can be used simultaneously.

All functions, including the generation of the hot air and the vacuum required in the process are bundled in the supply unit, which is equipped with the easy to operate i-OP and its clearly arranged display. In addition, the soldering stations have an interface for the Ersa solder fume extraction units as well as an USB port.

Via a microSD card, the stations can be quickly and safely configured. Therefore, they are optimally prepared for all applications in professional electronics manufacturing – including ESD protected zones.

The high-performance bushing A2 can be used to operate either the i-TOOL AIR S (200 W) or the i-TOOL HP (250 W). The station without the pumps is for users that want to use exclusively the i-TOOL HP and the i-TOOL MK2.


**TIP'N'
TURN**

Connectable tools:

- hot air iron
i-TOOL AIR S (200 W)
- soldering iron
i-TOOL MK2 (150 W)
- desoldering tweezers
CHIP TOOL VARIO (80 W)
- desoldering tweezers
CHIP TOOL (40 W)
- desoldering tool
X-TOOL VARIO (150 W)
- high-power soldering iron
i-TOOL HP (250 W)



Super fast tip change: by hand or using the 0A58 tool holder which is compatible with i-TOOL TRACE and all i-TOOL MK2 series soldering irons (option).

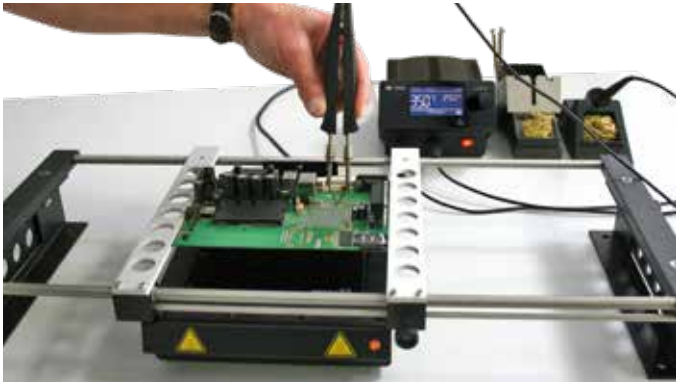

Technical data:

dimensions (W x D x H)	150 x 175 x 105 mm
weight	3.7 kg
voltage	230 V AC, 50 Hz
nominal power	200 W
design	antistatic
temperature range	50 – 450 °C

Soldering tools and accessories							
							
							
i-CON VARIO 2 MK2							

Order information:

Order No.	Description
0ICV2035A	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL AIR S
0ICV2035AC	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL AIR S and CHIP TOOL VARIO
0ICV2005AI	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL MK2 and i-TOOL AIR S
0ICV2035XV	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO
0ICV2005XVI	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO and i-TOOL MK2
0ICV2005AXV	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with X-TOOL VARIO and i-TOOL AIR S
0ICV2005HP	Multi-channel soldering & desoldering station i-CON VARIO 2 MK 2 with i-TOOL HP
0A58	Tip holder with Tip'n'Turn function for i-TOOL MK2



further information
on our website or
webshop

Ersa GmbH & Co. KG
Wertheim/Germany
info@ersa.de
www.ersa.com

America:
usa@kurtzrsa.com
Mexico:
info-kmx@kurtzrsa.com

China:
asia@kurtzrsa.com
Vietnam:
info-kev@kurtzrsa.com

Singapore:
info.kes@kurtzrsa.com
India:
india@kurtzrsa.com

France:
kefrance@kurtzrsa.com
Romania
info.romania@kurtzrsa.com