

Suction Cup VAS-100-1/4-PUR-B - Festo 1396098

Item no. FES-1396098

Manufacturer Festo

EAN 4052568062101


Festo vacuum component for safe gripping, holding and handling in automation.

TECHNICAL DATA

Betriebsdruck max [bar] -0.950000

HS-Code 84799070

Weight 0.135 kg

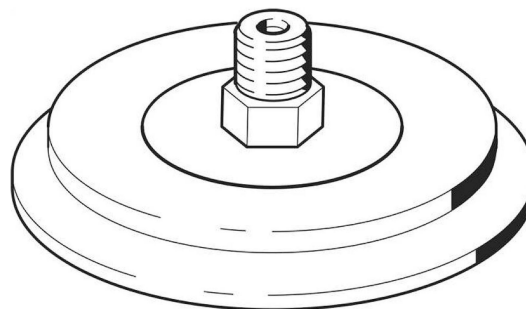

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo vacuum component for safe gripping, holding and handling in automation. The key technical data of this genuine Festo article are listed below.

Height balance suction cup [mm]	3,5
Nominal width [mm]	4,0
Suction diameter [mm]	100
Suction volumes [cm ³]	33,500
Connection position	top
installation position	arbitrary
Suction shape	Round flat
Operating pressure [bar]	-0,95
Nominal operating pressure [bar]	-0,7
Operating medium	Atmospheric air based on ISO 8573-1:2010 [7:-:-]
Corrosion resistant class KBK	2 - moderate corrosion stress
ambient temperature [°C]	-20 to 60

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Holding force for nominal operating pressure [N]	450,00
Product weight [g]	140
Fastening type	Via vacuum connection
vacuum connection	G1/4
colour	 blue
Shore hardness	60 ± 5
Stud material	Zinc pressure cast
Material information	RoHs compliant
Suction cups material	PUR
Effective suction diameter [mm]	90,5