

Strut Profile 30x60 4N, Slot 8, Anodized Aluminum, L 6070 mm - Bosch Rexroth 3842536472


Item no. BRR-3842536472

Manufacturer Bosch Rexroth

Strut profile 30x60 with profile type 4N and four open slots of size 8 in anodized aluminum. It forms the load-bearing base structure for frames, fixtures and enclosures in the Bosch Rexroth assembly system. Supplied in standard length 6070 mm, delivery unit of 10 pieces.

TECHNICAL DATA

Country of Manufacture	Sweden
HS-Code	76042100
Length	6070 mm
Note	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	108 kg

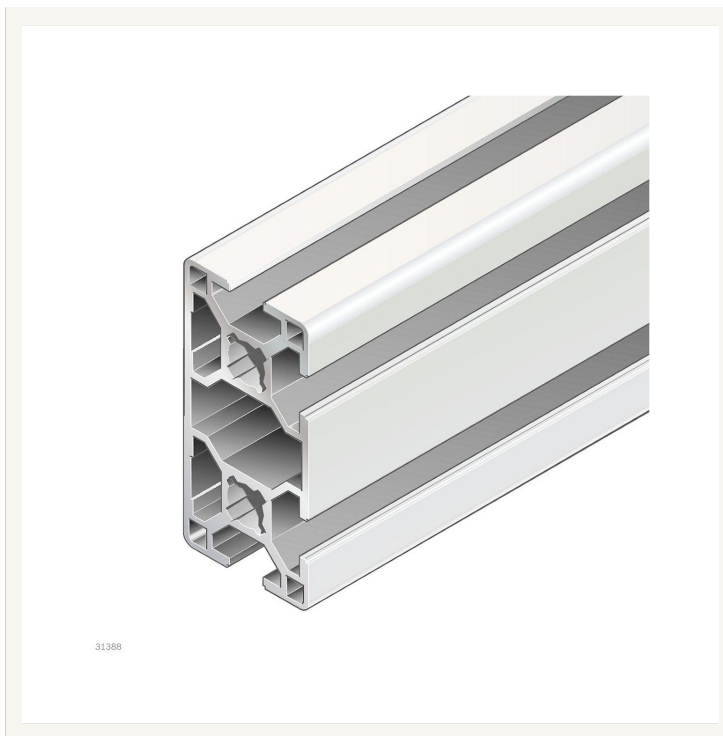

DESCRIPTION

The strut profile 30x60 4N from Bosch Rexroth is an anodized aluminum profile that serves as a load-bearing base element for frames, machine enclosures, fixtures and safety fences in the manual assembly system. Its four open size 8 slots allow connectors, add-on parts and accessories to be positioned flexibly.

- 30x60 mm cross-section in profile type 4N with four open slots
- Slot size 8 for compatible connectors and add-on parts
- Modular dimension 30 mm for a modular structure
- Anodized surface, natural color
- Recommended accessories: cover caps 30x30 and 30x60

TECHNICAL DATA

Property	Value
Cross-section	30x60 4N
Dimensions	30x60
Profile type	4N
Profile slot	8
Open slots	4

Property	Value
Modular dimension	30 mm
Length [L]	6070 mm
Color	Natural
Material	Aluminum, anodized
Profile surface [A]	5.8 cm ²
Area moment of inertia in x-direction [Ix]	20.2 cm ⁴
Area moment of inertia in y-direction [Iy]	5.5 cm ⁴
Moment of resistance in x-direction [Wx]	6.7 cm ³
Moment of resistance in y-direction [Wy]	3.8 cm ³
Torsional moment of inertia [It]	4.8 cm ⁴
Moment of torsion resistance [Wt]	2.4 cm ³
Mass [m]	1.6 kg
Weight	108 kg
Condition on delivery	Packaging unit in standard length
Delivery unit	10