

Cam Wheel VarioFlow Plus 120+ STS, 90° Deflection, Stainless Steel 1.4301 - Bosch Rexroth 3842547121


Item no. BRR-3842547121

Manufacturer Bosch Rexroth

Cam wheel for the 90° deflection of the conveyor chain in the VarioFlow plus stainless steel system, size 120+ STS. Housing and ball bearing are made of non-rusting steel 1.4301, the chain wheel of PA. Supplied fully assembled, including fastening material for the STS section profile.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
HS-Code	84313900
Weight	4.7 kg

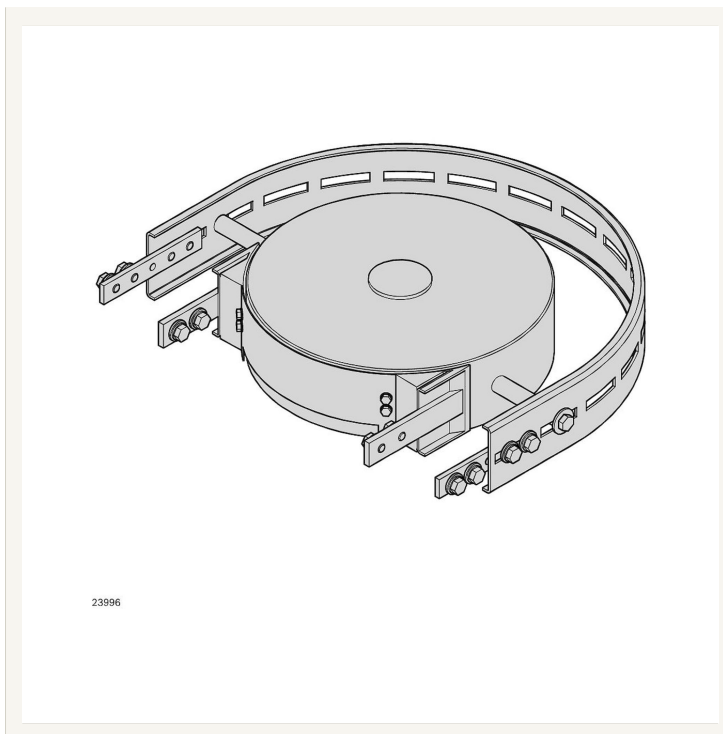

DESCRIPTION

The 120+ STS cam wheel is the deflection unit for horizontal 90° curves in the VarioFlow plus chain conveyor system in stainless steel design. It guides the conveyor chain around the curve with high corrosion resistance and suits applications with increased hygiene and cleaning requirements.

- Deflects the conveyor chain by 90° along the conveyor line
- Housing and ball bearing in non-rusting steel 1.4301
- Chain wheel in PA, white, ball bearing FDA-compliant
- Supplied fully assembled, incl. fastening material for STS section profile

TECHNICAL DATA

Deflection angle	90°
Size	120 mm
Dimension A	240.5 mm
Housing	Non-rusting steel 1.4301
Chain wheel	PA, white
Ball bearing	Non-rusting steel 1.4301/FDA
Effective sliding rail length	2x 0.63 m
Actual chain length	2x 0.48 m

Delivery condition
Scope of delivery
Weight

Fully assembled
Incl. fastening material for STS section profile
4.7 kg