

Static Friction Chain 240 mm, Length 2898 mm, Fmax 1250 N - Bosch Rexroth 3842998710


Item no. BRR-3842998710

Manufacturer Bosch Rexroth

Fully assembled static friction chain for the VarioFlow plus conveyor system, size 240 mm, length 2898 mm. The TPE friction coating (Shore A 70) enables controlled accumulation and transport of workpiece carriers. Materials comply with EU 10/2011 and FDA CFR 21 for food-contact applications.

TECHNICAL DATA

Ausführungsklasse	TEC
HS-Code	39269097
Weight	0.1 kg

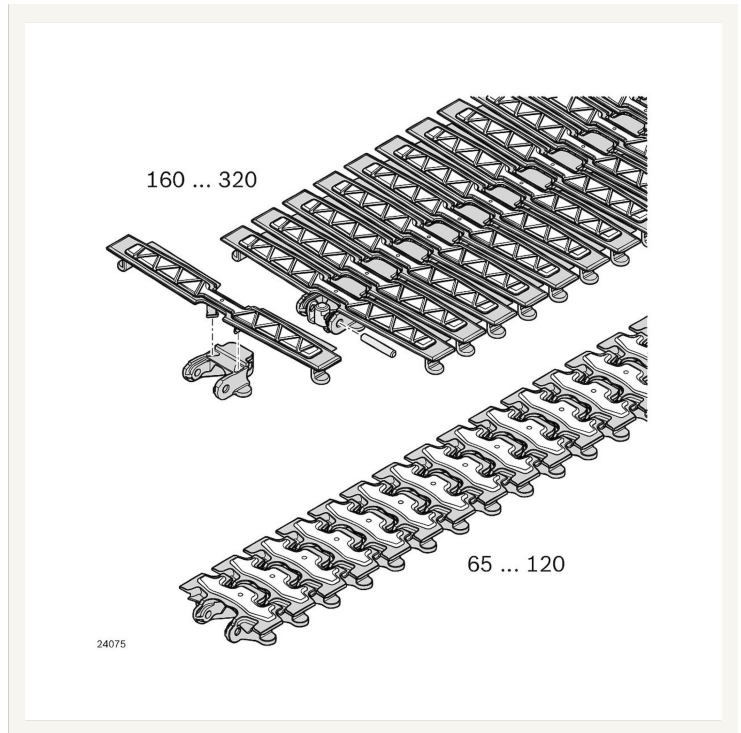

DESCRIPTION

The 240+FRICT static friction chain is a core component of the Bosch Rexroth VarioFlow plus conveyor system. Its TPE friction coating allows workpiece carriers to accumulate under controlled slip, making it well suited to pallet-transfer and assembly-line applications where back-pressure must be limited. The chain ships fully assembled and ready to install.

- **Size 240 mm** - compatible with all VarioFlow plus rails and components of the 240 mm width family
- **Length 2898 mm** - covers dividing numbers AZ = 2 to 84, combined with flat chain links
- **Max. force Fmax 1250 N** - rated for typical accumulation and transport loads in assembly technology
- **Food-contact compliant** - materials meet EU 10/2011 and FDA CFR 21 requirements
- **Fully assembled on delivery** - includes chain pin (stainless 1.4301) and pivot pin (PA 66), no additional assembly required

TECHNICAL DATA

Property	Value
System	VarioFlow plus
Size [b]	240 mm
Length [L]	2898 mm

Property	Value
Max. force [Fmax]	1250 N
Chain link	POM
Chain pin	Stainless steel 1.4301
Pivot pin	PA 66
Static friction coating	TPE, Shore hardness A 70
Food-contact compliance	EU 10/2011 and FDA CFR 21
Dividing number AZ	2 to 84
Scope of delivery	Chain complete, incl. chain pin and pivot pin
Packaging unit	1 piece