

Configurable Frame Workpiece Pallet WT 2/F-H, 400 x 400 to 1200 x 1200 mm - Bosch Rexroth 3842998757

Item no. BRR-3842998757

Manufacturer Bosch Rexroth

Aluminum frame workpiece pallet for accumulation roller chain conveyors, configurable from 400 x 400 mm to 1200 x 1200 mm. Supports up to 240 kg total load, ESD-suitable, available fully assembled (MT 1) or as a kit (MT 0). Standard grooves allow quick attachment of cross struts and workpiece supports.


TECHNICAL DATA

Ausführungsklasse **TEC**

Country of Manufacture **Germany**

HS-Code **84662020**

Weight **0.0099 kg**

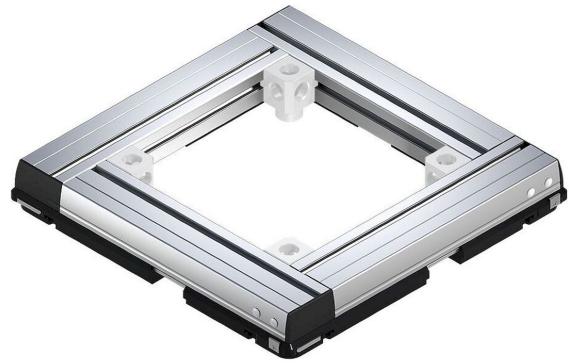

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The WT 2/F-H frame workpiece pallet from Bosch Rexroth is designed for use on accumulation roller chain conveyor systems and handles a total pallet weight of up to 240 kg (2 kg per cm of length). The aluminum frame delivers high rigidity at low dead weight; standard grooves allow cross struts and workpiece supports to be fitted without additional machining.

- Aluminum frame construction: high load capacity at low intrinsic weight
- PE (polyethylene) wear pads: quiet running, reduced wear on conveyor rails
- Integrated stop dampers: smooth, quiet accumulation against other pallets
- ESD-suitable for use in Electrostatic Protected Areas (EPA)
- Dimensions bWT x lWT: 400 x 400 mm to 1200 x 1200 mm; special dimensions on request
- Supplied fully assembled (MT 1) or as an unassembled kit (MT 0)

TECHNICAL DATA

Parameter	Value
Type	Frame workpiece pallet WT 2/F-H
Width bWT (mm)	400 / 480 / 640 / 800 / 1040 / 1200

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Parameter	Value
Length IWT (mm)	400 / 480 / 640 / 800 / 1040 / 1200
Dimension range bWT x IWT	400 x 400 mm to 1200 x 1200 mm
Max. total pallet weight mG	240 kg (2 kg per cm of length)
Frame weight mWT (depending on configuration)	7.3 kg (400 x 400) to 25.7 kg (1200 x 1200)
Frame material	Aluminum
Wear pads	PE (polyethylene)
Stop dampers	Integrated
ESD suitability	Yes
Delivery state	Fully assembled (MT 1) or unassembled kit (MT 0)
Scope of delivery	Corner modules, wear pads, damping elements, frame modules, caps
Recommended accessory	2x positioning bushing kit WT 2/H LE 2
Article number	3842998757